
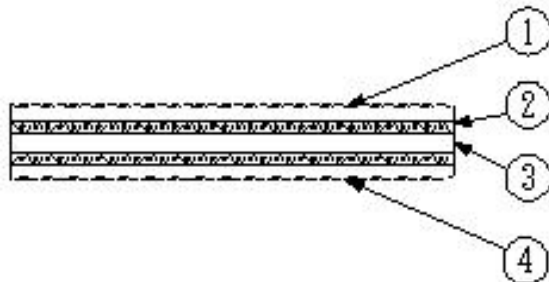


Technical Data Sheet		Belt type	NITTA BELT POLY HA-1500		NITTA CORPORATION		
P-177					 NITTA		
Main uses							
No.	Item	Description			Remarks		
1	Specification	Construction				①NBR (Textured pattern, Blue) ②PA Fabric ③PA Film ④NBR (Textured pattern, Blue)	
			Antistatic	Yes			
2	Dimensions	Width	20 to 325 {mm}				
		Length	800 to 105,000 {mm}				
		Thickness	4.5 {mm}				
		Joint	Skived joint Adhesive Polybond A and E				
3	Properties	Tensile strength	450 {N/mm}			Test speed: 50mm/min	
		Elongation at break	20 {%}			Ambient condition: 23°C*50%	
		Recommended elongation	2 {%}				
		Tension at 2%	22.5 {N/mm}			Ambient condition: 23°C*50%	
		Minimum pulley dia.	150 {mm}				
		Temperature range	-20 to +80°C {°C}				
		Coefficient of friction	0.5 to 0.6(Steel) (Both side)			Measuring condition: 7kPa*1mm/s Ambient condition: 23°C*50%	
Mass	5.0 {kg/m ² }						
4	Features						