
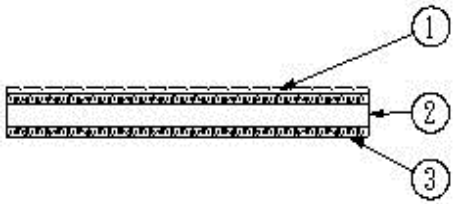


Technical Data Sheet		Belt type	NITTA BELT POLY KCS-350SN	NITTA CORPORATION  NITTA
Main uses				
No.	Item	Description	Remarks	
1	Specification		①NBR coating (Black) ②PA Film ③PA Fabric (Blue, Treated)	
			Antistatic	Yes
2	Dimensions	Width	10 to 300 {mm}	
		Length	300 to 100,000 {mm}	
		Thickness	1.1 {mm}	
		Joint	Skived joint Adhesive Polybond A	
3	Properties	Tensile strength	135 {N/mm}	Test speed: 50mm/min
		Elongation at break	20 {%}	Ambient condition: 23°C*50%
		Recommended elongation	1 {%}	
		Tension at 1%	3.4 {N/mm}	Ambient condition: 23°C*50%
		Minimum pulley dia.	30 {mm}	
		Temperature range	0 to +80°C {°C}	
		Coefficient of friction	0.2 to 0.3(Steel) (Fabric side) 0.3 to 0.4(Steel) (Black side)	Measuring condition: 7kPa*1mm/s Ambient condition: 23°C*50%
Mass	0.8 {kg/m ² }			
4	Features	Folder Belt in Web Off-set Printer, Superior Wear Resistance		