
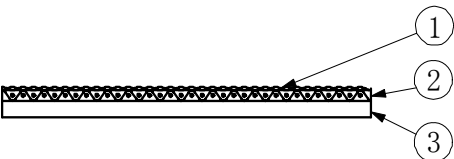


Technical Data Sheet		Belt type	NITTA BELT POLY SB-350S-2P	NITTA CORPORATION  NITTA
P-268				
Main uses	Conveyor Belt in Printing Machine (for Cold Set Ink)			
No.	Item	Description	Remarks	
1	Specification	Construction		①NBR coating (Black)
				②PA Fabric
				③PA Film
	Antistatic	Yes		
2	Dimensions	Width	5 to 325 {mm}	
		Length	500 to 100,000 {mm}	
		Thickness	0.65 {mm}	
		Joint	Skived joint Adhesive Polybond A	
3	Properties	Tensile strength	135 {N/mm}	Test speed: 50mm/min
		Elongation at break	20 {%}	Ambient condition: 23°C*50%
		Recommended elongation	1 {%}	
		Tension at 1%	3.4 {N/mm}	Ambient condition: 23°C*50%
		Minimum pulley dia.	30 {mm}	
		Temperature range	0 to +80°C {°C}	
		Coefficient of friction	0.3 to 0.4(Steel) (Black side) 0.1 to 0.2(Steel) (Nylon side)	Measuring condition: 7kPa*1mm/s Ambient condition: 23°C*50%
Mass	0.7 {kg/m ² }			
4	Features	Anti-ink Transfer		