
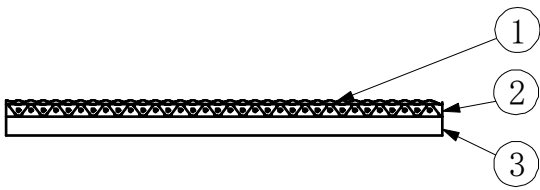


Technical Data Sheet		Belt type	<b>NITTA BELT POLY SG-750-2P</b>	<b>NITTA CORPORATION</b> 
		P-006		
Main uses				
No.	Item	Description	Remarks	
1	Specification		①NBR coating (Green) ②PA Fabric ③PA Film	
			Antistatic	No
2	Dimensions	Width	6 to 325 {mm}	
		Length	500 to 105,000 {mm}	
		Thickness	1.1 {mm}	
		Joint	Skived joint Adhesive Polybond A	
3	Properties	Tensile strength	225 {N/mm}	Test speed: 50mm/min
		Elongation at break	20 {%}	Ambient condition: 23'C*50%
		Recommended elongation	1 {%}	
		Tension at 1%	5.6 {N/mm}	Ambient condition: 23'C*50%
		Minimum pulley dia.	50 {mm}	
		Temperature range	-20 to +80°C {°C}	
		Coefficient of friction	0.3 to 0.4(Steel) (NBR side) 0.1 to 0.2(Steel) (PA side)	Measuring condition: 7kPa*1mm/s Ambient condition: 23'C*50%
Mass	1.2 {kg/m <sup>2</sup> }			
4	Features			