
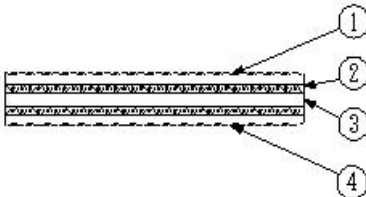


Technical Data Sheet		Belt type	NITTA BELT POLY XH-750-4	NITTA CORPORATION 
P-055				
Main uses	Belt for Foulder Gluer Machines			
No.	Item	Description	Remarks	
1	Specification	Construction		①Soft NBR (Textured Pattern, Blue)
				②PA Fabric
			③PA Film	
			④Soft NBR (Textured Pattern, Blue)	
	Antistatic	Yes		
2	Dimensions	Width	6 to 320 {mm}	
		Length	500 to 103,000 {mm}	
		Thickness	4.25 {mm}	
		Joint	Skived joint Adhesive Polybond A and E	
3	Properties	Tensile strength	225 {N/mm}	Test speed: 50mm/min
		Elongation at break	20 {%}	Ambient condition: 23°C*50%
		Recommended elongation	1 {%}	
		Tension at 1%	5.6 {N/mm}	Ambient condition: 23°C*50%
		Minimum pulley dia.	70 {mm}	
		Temperature range	-20 to +80°C {°C}	
		Coefficient of friction	0.8 to 0.9(Paper) / 0.7 to 0.8(Steel) (Both side)	Measuring condition: 7kPa*1mm/s Ambient condition: 23°C*50%
Mass	4.4 {kg/m ² }			
4	Features			