
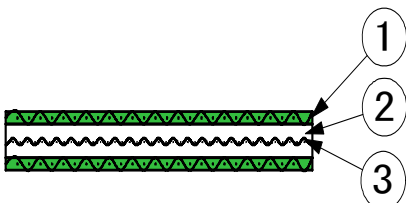


Technical Data Sheet		Belt type	PolySprint TTZ-4E10		NITTA CORPORATION 	
PS-040						
Main uses		Printing machine, Bookbinding machine				
No.	Item	Description			Remarks	
1	Specification	Construction				
		Antistatic	yes			
2	Dimensions	Width	10 to 340 {mm}			
		Length	400 to 100,000 {mm}			
		Thickness	1.0 {mm}			
		Joint	Finger Joint (standard dimension: 10W * 30L)			
3	Properties	Tensile strength	80 {N/mm}			Test speed: 50mm/min
		Elongation at break	12 {%}			Ambient condition: 23'C*50%
		Recomend elongation	1 {%}			
		Tension at 1%	4 {N/mm} after 200hrs running-in			Ambient condition: 23'C*50%
		Minimum pulley dia.	30 {mm}			
		Temperature range	-20 to +60 {C}			
		Coefficient of friction	0.6 to 0.7 (Paper) Coating side			Measuring condition: 7kPa*1mm/s Ambient condition: 23'C*50%
Mass	1.0 {kg/m ² }					
4	Features					